

Pressure switch series B4 and B7

General purpose or Ex-proof according UL or ATEX (Ex d or Ex ia)

Accuracy: ± 1 %

Features

- Ambient temperature up to 60 °C for Ex applications
- Ex II 2 GD or Ex II 1 GD
- Class 1 Division 1 Gr. B, C and D according UL
- Protection IP54, IP66 or NEMA 4, 4X, 7, 9 and 13 (UL)
- Wetted parts available in several materials
- High proof pressure

Ranges

-37,5/+37,5 mbar up to 210 bar

-15/+15 in. H₂O up to 3000 psi

Applications

Chemical and petrochemical industry

Machine and apparatus construction


Food and beverage industry

Pulp and paper industry



Technical specification	B4 series							B7 series						
Construction	Weatherproof							Ex-proof according UL CSA on request				Flame proof according EN 60079-0, -1, -31 Intrinsically safe acc. IEC 60079-0 and EN 60079 -11, -26		
Switch functions	One setpoint, single pole double throw (SPDT) or 2 times SPDT (2SPDT)													
Adjustable range	From 15 % to 100 %, below 15 % consult factory													
Deadband	From 0,5 % to 15 % F.S., depending on material, range and microswitch													
Measuring principle	Diaphragm-piston-cylinder-system													
Range in mbar	25	75	150	250	375	-37,5/37,5	-75/75							
Range in bar	1	2	4	7	14	28	42	70	140	210	-1/0	-1/1	-1/2	-1/4
Limits (pressure ranges)	mbar		vacuum		1 to 4 bar		7 to 14 bar		28 to 42 bar		70 to 210 bar			
Proof pressure in bar	1,4		17		35		69		165		827			
Burst pressure in bar	2,4		28		103		207		207		1240			
Pressure type	Gauge, vacuum and compound													
Process connection	¼ NPT female, ½ NPT male/¼ NPT female (standard for ≥ 70 bar) ½ NPT female, G ½ B male, M20x1,5, others on request (metric connections with adapter)													
Connection location	Lower													
Material														
Pressure connection	Stainless steel 316 (1.4401), optional Monel For mbar ranges steel epoxy coated standard, stainless steel on request													
Diaphragm	Buna N, Viton (max. 70 bar), Teflon, stainless steel 316 (1.4401) or Monel (stainless steel and Monel only from 1 bar to 70 bar)													
Housing	Aluminum, epoxy coated black													
Accuracy	1,0 % F.S.													
Electrical specification														
Microswitch ratings	From 6 A 30 VDC up to 22 A 250 VAC (see microswitch table)													
Flameproof and dust ignition protection by enclosure								Class 1 Div. 1 Gr. B, C and D Class 2 Div. 1 Gr. E, F and G				Ex II 2 GD Ex d IIC T6 Gb Ex t IIIC T85°C Db IP6X SIRA 02 ATEX 1391X		
Intrinsically safe and dust ignition protec- tion by enclosure												Ex II 1 GD Ex ia IIC T4 Ga Ex ia IIIC T135°C Da SIRA 04 ATEX 2081		
Electrical connection	¾ NPT female, optional cable glands, ½ NPT with reducer bushing, M20x1,5, others on request													
General specification														
Permissible														
Ambient temperature	-25 ... 60 °C							-25 ... 65 °C				-20 ... 60 °C		
Medium temperature	Buna N and Teflon -18 ... 65 °C, Viton -7 ... 150 °C, stainless steel and Monel -18 ... 150 °C (Medium temperature of ATEX approved switches is restricted due to temperature class.)													
Storage temperature	-40 ... 60 °C													
Effect	Max. 0,4 % / 10 K ref. 20 °C													
Protection according UL	NEMA 4, 4X and 13							NEMA 7 and 9						
Protection according EN 60 529/IEC 529	IP54, optional IP66							IP66						
CE-mark	Low voltage regulations EN 61 010-1, EN 60 947-1													
Mounting	Standard stem, wall (BP) or 2" pipe mounting (TM)													
Weight mbar/bar in kg	1,2/0,7							1,6/1,2						
Accessories, options	Diaphragm seals, valves, adapters, NACE													

General dimensions in mm

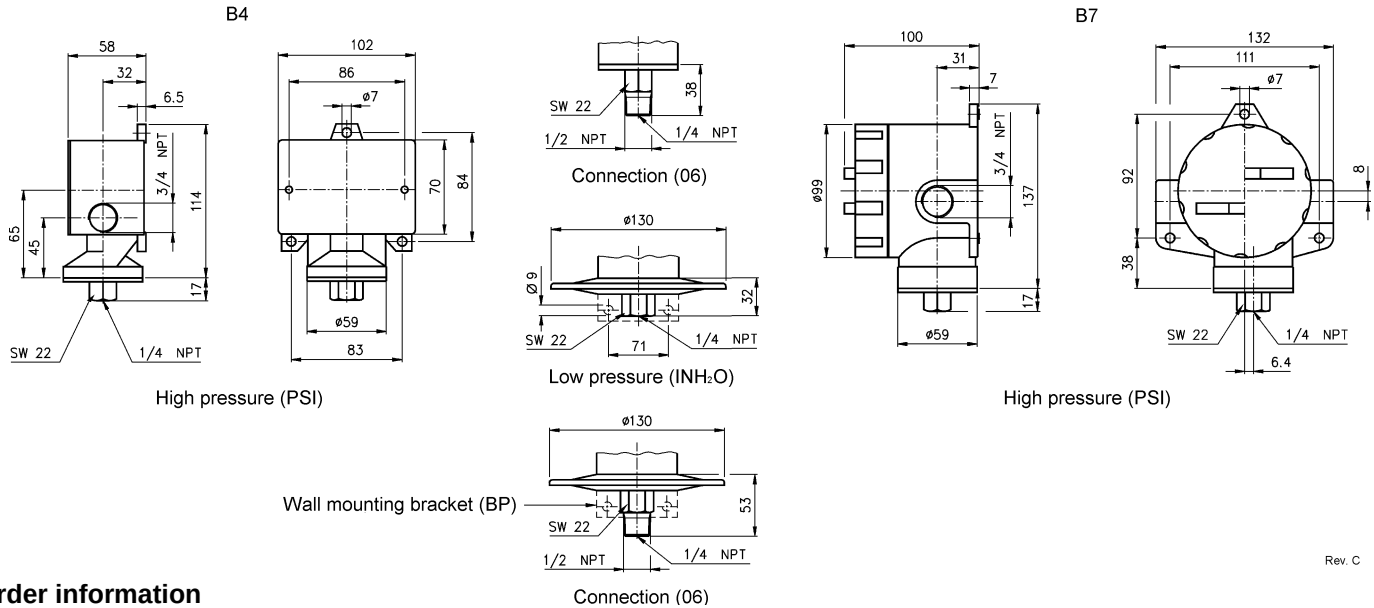

Order information

Switch element	Material actuator seal	Range	Engineering unit	Protection	Process connection	Electrical connection	Options
SPDT (20) Narrow deadband ¹⁾ (15 A 250/480 VAC, 0,4A 120VDC)	(B) Buna N ¹⁾	-15/ 15	INH2O	(IP) Standard B4 IP54 B7 IP66	(25) ¼ NPT female	(=) Standard	(NH) Tagging wired
(21) Ammonia service (5A 250 VAC, 6 A 30 VDC)	(V) Viton ²⁾	-30/ 0	INH2O	(IP65) IP66 (for B4)	(06) ¼ NPT female/ ½ NPT male ¹⁾	(JL) ¾ to ½ NPT female reducing bushing	(FS) Factory adjusted set-point
(22) Hermetically sealed (5 A 250 VAC)	(T) Teflon ¹⁾	-30/ 15	INH2O	(UL) UL approval B4 NEMA 4 B7 NEMA 7 & 9	(07) ½ NPT female	(JM) ¾ NPT to M20x1,5 female reducing bushing	(6B) Oxygen cleaned (not for Buna N diaphragm; in. H ₂ O ranges only with option TA)
(23) Heavy duty AC (22 A 250 VAC)	(S) 316 (1.4401) ³⁾	-30/ 30	INH2O		(15) G ½ B male ²⁾	(K3) Terminal block (standard for B7 with 2xSPDT, not for B4)	(TM) 2" pipe mounting bracket
(24) General purpose ¹⁾ (15 A 250 VAC, 6 A 30 VDC)	(P) Monel ³⁾	-30/ 60	INH2O		(16) M20x1,5 male ²⁾	Only for protection IP	(TA) 316 (1.4401) pressure connection for in. H ₂ O ranges
(26) Sealed environment proof ¹⁾ (15 A 250 VAC, 0,4A 120VDC)		100	PSI	(CEN3) ATEX Ex d with cable gland Ex d M20x1.5 (only for B7)	¹⁾ standard for ranges ≥ 70 bar	(KV2) Plastic cable gland IP65, PG11	(BP) Wall mounting bracket for in. H ₂ O ranges
(27) High temp. (max. 150 °C) (15 A 250 VAC)		15	PSI	(CEN4) ATEX Ex d and Ex t ¾ NPT thread female (only for B7)		(KV3) Plastic cable gland IP65, PG13,5	(MD) Metric ranges
(31) Low level (gold) contacts (1 A 125 VAC, 500mA 28VDC)		30	PSI	(CEN6) ATEX Ex ia ¾ NPT thread female (only for B7)		(KV4) Plastic cable gland IP65, PG16	
(32) Hermetically sealed general purpose (11 A 250 VAC, 5 A 28 VDC)		60	PSI	(CEN7) ATEX Ex ia with cable gland Ex d M20x1.5 (only for B7)		(KV52) Plastic cable gland PG13,5	
(42) Hermetically sealed, gold contacts (1 A 125 VAC)		100	PSI				
(50) Variable deadband (15 A 250 VAC)		200	PSI				
2xSPDT (61) see code (20)		400	PSI				
(62) see code (26)		600	PSI				
(63) see code (27)		1000	PSI				
(64) see code (24)		3000	PSI				
(65) see code (21)			PSI				
(67) see code (22) (not B4 series)			PSI				
(68) see code (32) (not B4 series)			PSI				
(70) see code (31)			PSI				
(71) see code (42) (not B4 series)			PSI				
¹⁾ VDC rating not UL listed	¹⁾ max. medium temperature -18 ... 65 °C						
	²⁾ max. medium temperature -7 ... 150 °C						
	³⁾ max. medium temperature -18 ... 150 °C only ranges from 15 to 1000 psi						
		Note the range can also be specified in mbar or bar					
					²⁾ with Adapter		

Order example

Type	Switch element	Material actuator seal	Range	Engineering unit	Protection	Process connection	Electrical connection	Option
B7	24	B	100	PSI	UL	25	JL	NH

Ashcroft Instruments GmbH

Germany
 Max-Planck-Str. 1, D-52499 Baesweiler
 P.O. Box 11 20, D-52490 Baesweiler
 Tel.: +49 (0) 2401 808-0, Fax: +49 (0) 2401 808-125

France
 48, Chemin des Landes
 F-69700 Montagny
 Tel.: +33 (0) 9 65 32 71 31, Fax: +33 (0) 4 72 39 10 57

Website: www.ashcroft.eu

e-Mail: sales@ashcroft.com

United Kingdom
 Unit 17 & 18 William James House
 Cowley Road, Cambridge CB4 0WX
 Tel.: +44 (0) 12 23 39 55 00, Fax: +44 (0) 12 23 39 55 01