

All stainless steel process gauge open or solid front Model T5500 and T6500

According EN 837-1
 Nominal size 100 mm or 160 mm
 Accuracy: Class 1 (EN)



FEATURES

- Rugged stainless steel construction
- Socket and case welded
- Protection IP66/IP67
- Optional ATEX approved
 CE Ex II 2 GD c
- Usable to full scale
- Overload protection 130 %
- Dry, liquid filled or liquid less (PLUS! gauge)
- Measuring system stainless steel or Monel

RANGES

-1 ... 0 bar up to 0 ... 1000 bar
 -30 in. Hg ... 0 psi up to 0 ... 15.000 psi

APPLICATIONS

- Chemical and petrochemical industry
- Machine and apparatus construction
- Food and beverage industry
- Pulp and paper industry

SPECIFICATIONS

Model Number:	T5500, open front, rear blowout disk T6500, solid front, rear blowout disk
Accuracy:	Standard: Class 1, 1% full scale Optional: 0.5 % F.S.
Dial Size:	100mm or 160mm diameter
Case Material:	Standard: 304 stainless steel, Optional: 316 stainless steel T5500: open front, rear blowout disk T6500: solid front, rear blowout disk
Ring:	304 stainless steel 316 stainless steel optional
Window:	T5500: Standard: glass, Optional: laminated safety glass or acrylic T6500: Standard: laminated safety glass Optional: acrylic


Dial:	Aluminum, white background, black figures and intervals.
Pointer:	Standard: aluminum black Optional: adjustable micro-meter, red set hand, maximum pointer
Movement:	304/303 stainless steel
Bourdon Tube and Socket:	Standard: 316L stainless steel Optional: Monel
Connection Size:	¼ NPT male, ½ NPT male G ¼ B male, G ½ B male Others on request
Connection Location:	T5500: Lower or back T6500: Lower only
ATEX:	Conformity acc. to RL 94/9/EC appendix X for mechanical equipment in potential hazardous areas Optional, Marking CE Ex II 2 GD c IIC Tx File No. 35134585 at notified body 0044, TÜV NORD CERT (only with safety glass or acrylic glass)
Weather Protection:	IP66: Dry case IP67 & IP66: Liquid filled or hermetically sealed case
Temperature:	Ambient: -40 ... 70 °C -25 ... 60 °C (ATEX) Medium: Max. 200°C dry Max. 100°C liquid filled Storage: -40 ... 70 °C -25 ... 60 °C (ATEX) Effect: Max 0.4 % / 10 K
Weight in kg (dry/filled):	T5500: 0,9 -1,2 (dry) 1,2 - 2,0 (liquid filled) T6500: 0,9 -1,2 (dry) 1,2 - 2,0 (liquid filled)
Mounting:	Standard: stem Optional: flush or surface
Filling:	Glycerin, Silicone, Halocarbon Others on request

OPTIONAL FEATURES

PLUS!™ Performance:	LL
Shatter Proof Glass Window:	SG
Acrylic Window:	PD
Set Hand:	SH
Maximum Pointer:	EP
Electrical Contact:	see data sheet T5500-KF
Integrated pressure transducer:	see data sheet T55E

General dimensions in mm


T5500 open front with blow out compensation plug

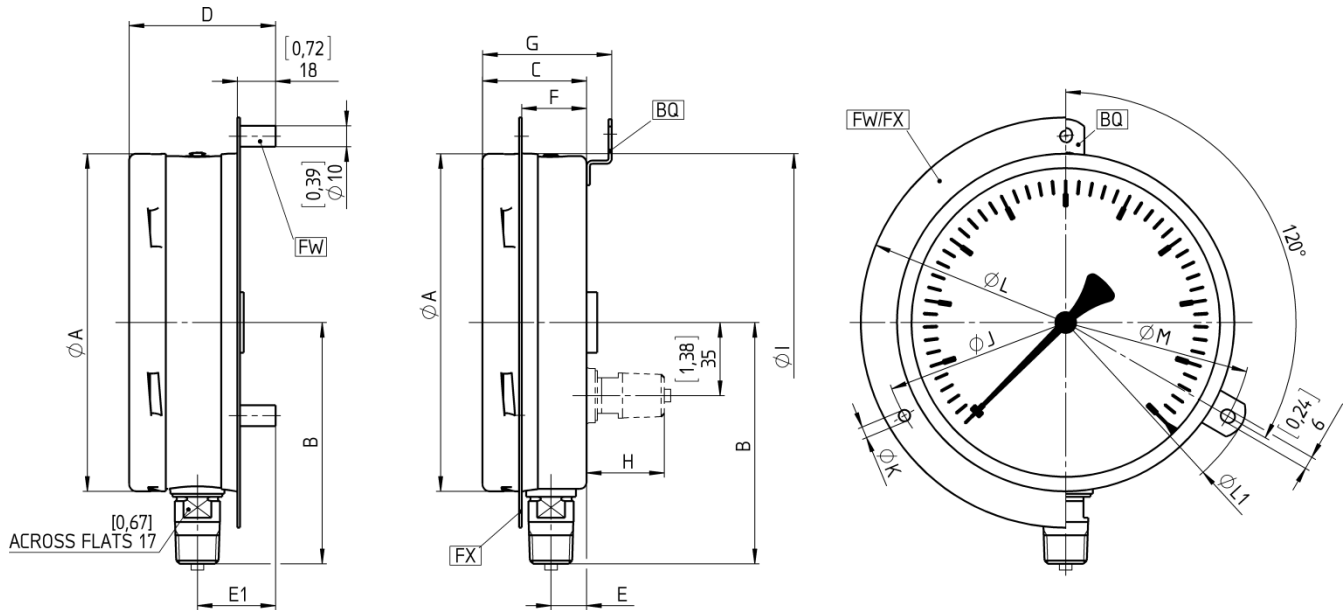

NG	A	B	C	D	E	E1	F	G	H	I	J	K	L	L1	M
100 mm	[3,97] 101	[3,36] 85	[2,01] 51	[2,72] 69	[0,73] 18,5	[1,44] 36,5	[1,26] 32	[2,48] 63	[1,38] 35	[4,00] 102	[4,57] 116	[0,19] 4,8	[5,20] 132	[5,28] 134	[4,69] 119
160 mm	[6,35] 161	[4,54] 115	[1,96] 50	[2,76] 70	[0,67] 17	[1,47] 37	[1,22] 31	[2,43] 62	[1,46] 37	[6,36] 162	[7,01] 178	[0,22] 5,5	[7,72] 196	[7,64] 194	[7,05] 179

Rev. M

T6500 solid front with blow out back wall

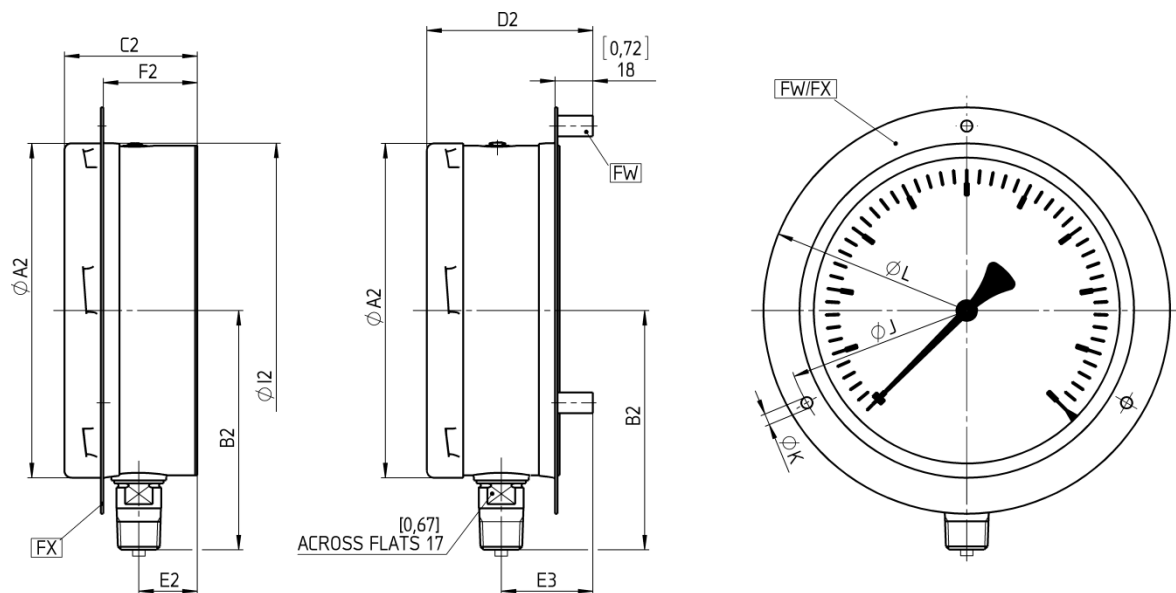

NG	A2	B2	C2	D2	E2	E3	F2	I2	J	K	L
100 mm	[3,97] 101	[3,36] 85	[2,38] 61	[2,91] 74	[1,02] 26	[1,55] 39	[1,63] 42	[4,00] 102	[4,57] 116	[0,19] 4,8	[5,20] 132
160 mm	[6,35] 161	[4,54] 115	[2,52] 64	[3,15] 80	[1,11] 28	[1,74] 44	[1,78] 45	[6,36] 162	[7,01] 178	[0,22] 5,5	[7,72] 196

Rev. M

Ashcroft Instruments GmbH

Germany
 Max-Planck-Str. 1, D-52499 Baesweiler
 P.O. Box 11 20, D-52490 Baesweiler
 Tel.: +49 (0) 2401 808-0, Fax: +49 (0) 2401 808-125

France
 48, Chemin des Landes
 F-69700 Montagny
 Tel.: +33 (0) 9 65 32 71 31, Fax: +33 (0) 4 72 39 10 57

Website: www.ashcroft.eu

e-Mail: sales@ashcroft.com

United Kingdom

Unit 17&18 William James House
 Cowley Road, Cambridge CB4 0WX
 Tel.: +44 (0) 12 23 39 55 00, Fax: +44 (0) 12 23 39 55 01

Order information

Size	Type	System material	Execution	Process connection	Connection orientation	Range	Engineering unit	Filling/Case material	Options
(100) 100 mm	T5500	(S) 316L (1.4404) ≤ 1000 bar	(D) Dry	(04) ½ NPT male ¹⁾	(L) Lower	-1/ 0 ¹⁾ -1/ 1,5	(BAR)	(=) Standard no filling	(NH) Tagging wired
(160) 160 mm	T6500	(P) Monel ≤ 1000 bar	(L) Liquid filled	(02) ¼ NPT male ¹⁾	(B) Back ¹⁾	-1/ 3 -1/ 5 -1/ 9 -1/ 15 -1/ 24		(GV) Silicone	(CS) Dual scale (Outer scale is dominant)
				(09) 9/16-18 UNF-2B Aminco		0/ 0,6 ²⁾ 0/ 1 ¹⁾		(GV3) Silicone 3 cst	(DA) Dial Marking
				(13) G ¼ B male ¹⁾		0/ 1,6 0/ 2,5 0/ 4		(GR) Glycerin	(TU) Throttle plug stainless steel
				(14) G 3/8 B male ¹⁾		0/ 6 0/ 10 0/ 16		(GX) Halocar- bon ¹⁾	(6B) Cleaned for Oxygen service (not for T5500 (open front) acc. EN 837-1)
				(15) G ½ B male ¹⁾		0/ 25 0/ 40 0/ 60		(LJ) Field fillable (only for execution D)	(6W) Cleaned free of oil and grease
				(16) M20x1,5 male ¹⁾		0/ 100 0/ 160 0/ 250		(YW) Case ma- terial 316L (1.4404)	(MP) Micrometer pointer
				(KQ) R½ male tapered DIN 2999 ¹⁾		0/ 400 0/ 600 0/1000			(PD) Acrylic glass
				(KN) ½" male straight (JIS, BSP) ¹⁾					(SG) Safety glass
				(KP) 3/8" male straight (JIS, BSP) ¹⁾					(BQ) Wall mounting brackets
									(FX) Front flange
									(FW) Back flange
									(UF) U-clamp (not for T6500)
									(AJ) Calibration 0,5 % F.S. (not for ranges < 1 bar (dry) or < 4 bar (liquid filled))
									(LL) Liquid less gauges (Halocarbon filling not allowed)
									(NZ) Liquid less gauges, silicon free (not for execution L)
									(PR) Receiver gauge
									(OS) Overload stop
									(VS) Vacuum stop
									(ATEX) ATEX approval
									(C3) Material test report acc. to DIN EN 10204 3.1
									(C4) Calibration certificate
									(HY) Hydrostatic test 130%
									(MQ) PMI test
				¹⁾ max. 1000 bar	¹⁾ not for type T6500	¹⁾ not allowed with liquid less (LL or NS) option ²⁾ not allowed with execu- tion L or with liquid less (LL or NS) option	psi and others on request	¹⁾ not allowed in combination with liquid less (LL) option	Option listing starts with "X", followed by options separated by "=" Example: X=NH=SG=FW

Order example

Size	Type	System material	Execution	Process connection	Connection Orientation	Range	Engineering unit	Filling/Case material	Options
100	T5500	S	D	15	L	0/16	BAR	YW	NH

Ashcroft Instruments GmbH

Germany
 Max-Planck-Str. 1, D-52499 Baesweiler
 P.O. Box 11 20, D-52490 Baesweiler
 Tel.: +49 (0) 2401 808-0, Fax: +49 (0) 2401 808-125

France
 48, Chemin des Landes
 F-69700 Montagny
 Tel.: +33 (0) 9 65 32 71 31, Fax: +33 (0) 4 72 39 10 57

Website: www.ashcroft.eu

e-Mail: sales@ashcroft.com

United Kingdom
 Unit 17&18 William James House
 Cowley Road, Cambridge CB4 0WX
 Tel.: +44 (0) 12 23 39 55 00, Fax: +44 (0) 12 23 39 55 01