

Product Data Sheet


Check Valve



Key features

- In-line poppet type
- Allows flow in one direction only, closing when flow reverses
- Max temperature 200°C
- VITON seats (VITON 90 available for NACE, KALREZ also available if required)
- NPT female X female connections

General Arrangement Drawing

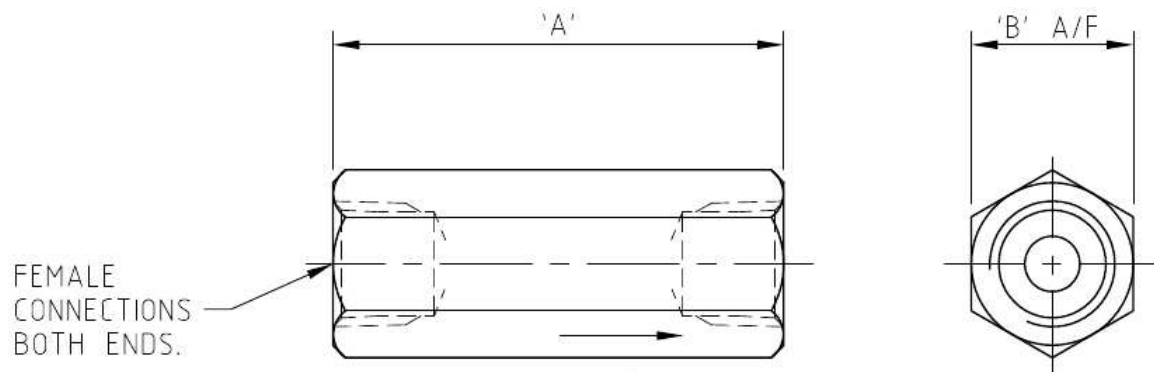

Sizes	Part No	Max Pressure	Cracking Pressure	A	B	Weight	CV (Max)
1/4"	CV25S	6,000 PSI	7 PSI	0.87"	2.31"	0.2kg	0.7
3/8"	CV38S	6,000 PSI	7 PSI	1.10"	2.50"	0.3kg	0.7
1/2"	CV50S	6,000 PSI	7 PSI	1.10"	3.06"	0.3kg	2.0
3/4"	CV75S	6,000 PSI	4 PSI	1.63"	3.63"	0.8kg	4.6
1"	CV10S	6,000 PSI	4 PSI	2.05"	4.19"	0.9kg	7.2

Rev 1.1

Product Data Sheet


SN50S Type Gauge Snubber



Key Features

- Only one spindle needed for all processes
- Snubbing rate can be altered after installation on site
- Anti blow out spindle
- In emergency situation can be shut off

General Arrangement Drawing

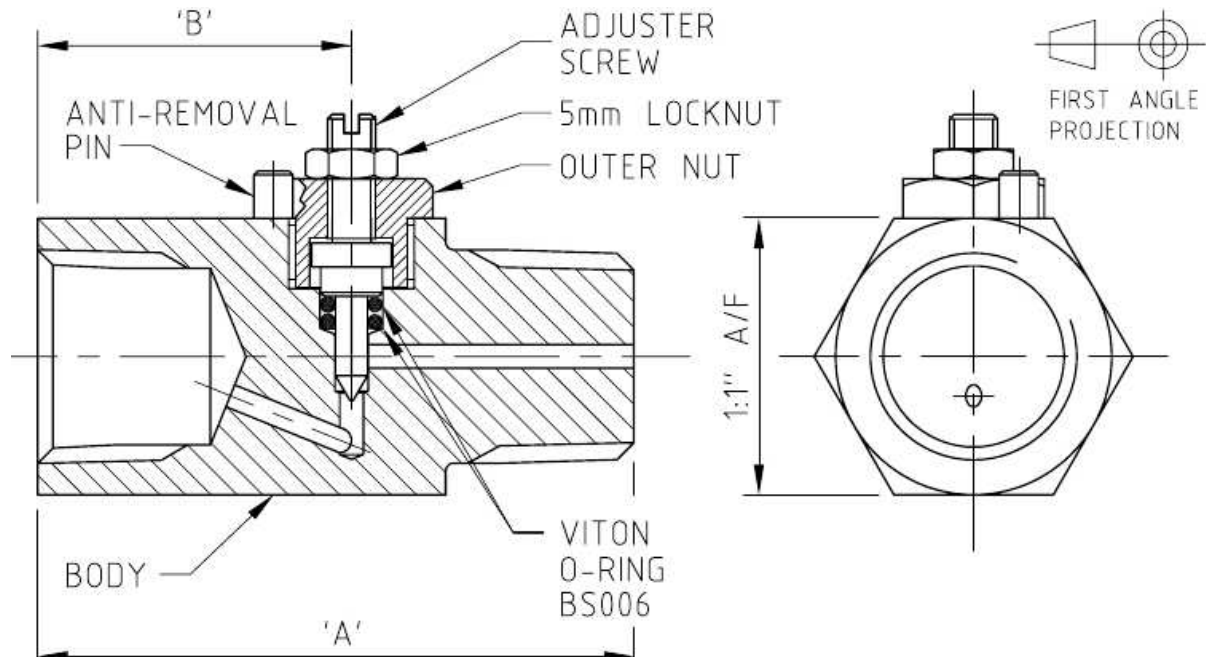

Seals	Viton
Max temp	120°C
Max Pressure	6,000 PSI
Standard Material	316 Stainless steel
Standard Connections	½" NPT Male x Female

Sizes	Part No	A	B
¼	SN25S	1.825"	0.938"
⅜	SN38S	2.125"	1.125"
½	SN50S	2.375"	1.250"

Rev 1.1

Product Data Sheet


GAH50S Type Swivel Gauge Adaptor



Key features

- Allows 360° positioning of gauges on site
- A wide range of connection sizes and alternative materials available upon request

General Arrangement Drawing

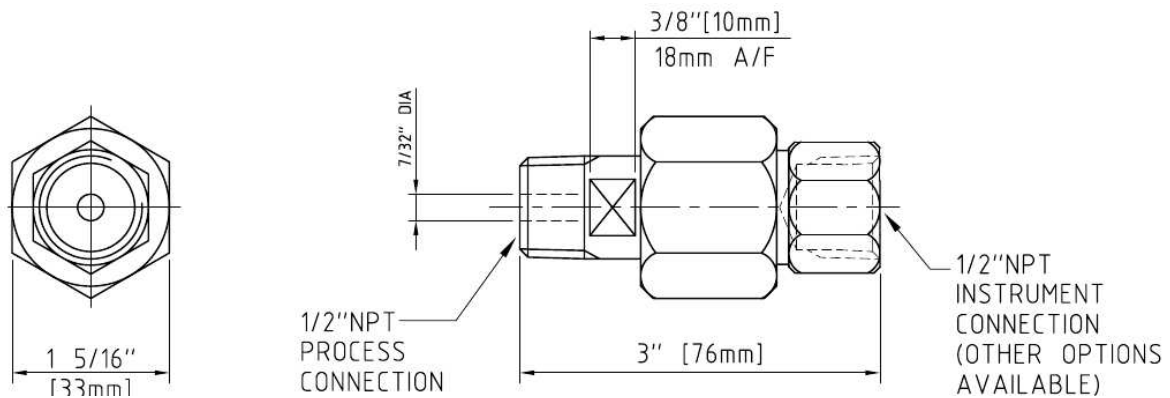

Max Pressure	10,000 PSI
Standard Material	316 Stainless steel
Standard Connections	½" NPT male X female
Max Temperature	540°C
Seals	Metal

Rev 1.2

Product Data Sheet


GAX50S Type Swivel Gauge Adaptor



Key features

- Allows 360° positioning of gauges on site
- A wide range of connection sizes and alternative materials available upon request

General Arrangement Drawing

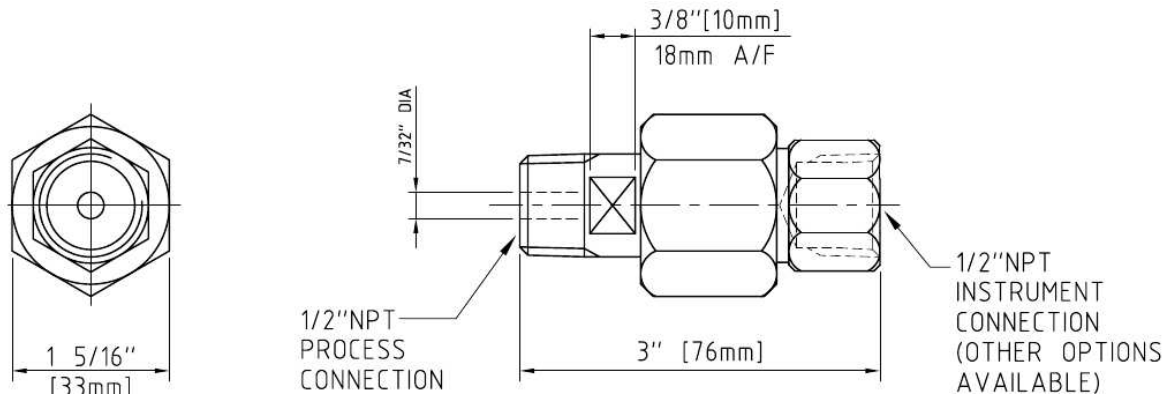

Max Pressure	10,000 PSI
Standard Material	316 Stainless steel
Standard Connections	½" NPT male X female
Max Temperature	540°C
Seals	Metal

Rev 1.1