


Swing Check Valve

Screwed BSPP
Metal Seat



Pressure/Temperature Ratings

Max Pressure	3/8" to 3" 16 Bar
	4" 10 Bar
Pressure to Open	0.05 Bar
Temperature	-10°C to 100°C

Material List

Body	Brass
Cap	Brass
Flap	Brass
Gasket	NBR

Dimensions

DN	Size	L	H	Kg
10	3/8"	47	30	0.17
15	1/2"	47	31	0.15
20	3/4"	54	34	0.21
25	1"	64	40	0.33
32	1 1/4"	76	46	0.49
40	1 1/2"	83	52	0.65
50	2"	98	57	1
65	2 1/2"	116	64	1.56
80	3"	135	77	2.24
100	4"	164	91	3.8

Brass Y Check Valve - Metal Disc

Screwed BSPP

Pressure/Temperature Ratings


Pressure	½" to 1" 35 Bar
	1¼" to 2" 25 Bar
Opening Pressure	0.02 Bar
Temperature	-10°C to 150°C

Material List

Body	Brass UNI EN 12165 CW617N
Disc	Stainless Steel AISI 304
Gasket	Viton

Dimensions

Size	L	H	Kg
½"	52	36	0.14
¾"	63	44	0.22
1"	75	58	0.38
1¼"	91	62	0.63
1½"	102	69	0.84
2"	118	86	1.39

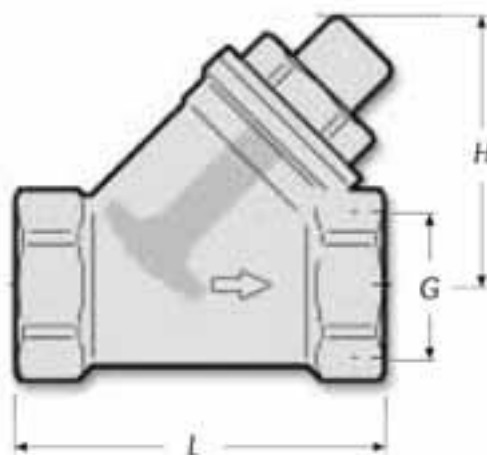

Brass Spring Check Valve


Full Flow Check Valve, NBR Seal, Polyacetal Disc, Screwed BSPP Female

Pressure/Temperature Ratings		
Pressure	½" to ¾"	PN40
	1" to 1¼"	PN25
	1½" to 2"	PN16
Temperature	-10°C to 90°C	




Material List	
Body	Brass CW617N
End Connector	Brass CW617N
Disc	P.O.M
Disc Holder	P.O.M
Spring	Stainless Steel AISI 302

Dimensions					
Size	Ø	H	L	F	Kg
½"	15	56.3	30.5	16.5	0.13
¾"	20	61	38	17.4	0.19
1"	25	74.8	46.5	20.7	0.32
1¼"	32	93.5	56.5	22.5	0.56
1½"	40	99.4	68	22.8	0.83
2"	50	109.9	83	27	1.25

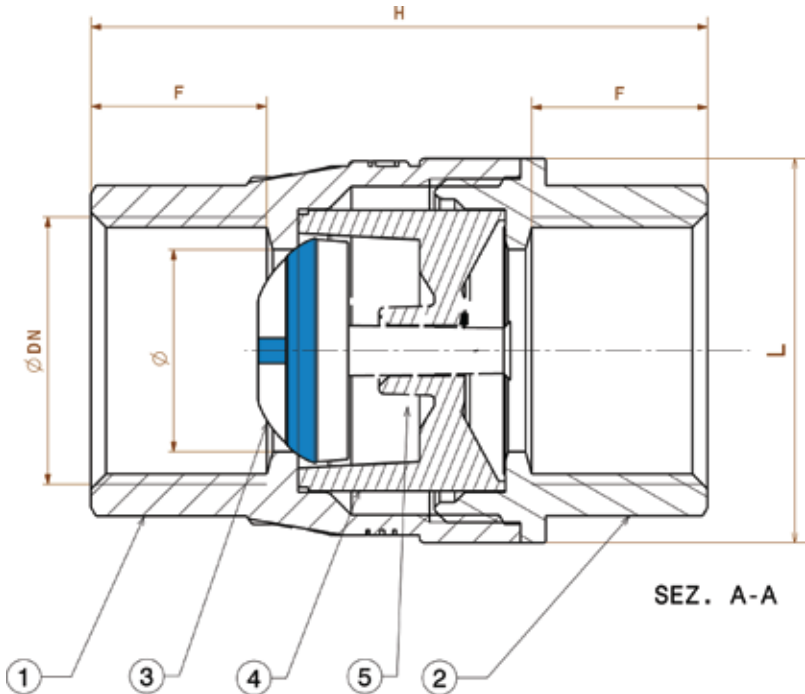

Brass Spring Check Valve Female x Male

Screwed BSPP, NBR Gasket



Pressure/Temperature Ratings

Opening Pressure	0.02 Bar	
Pressure	½" to 1"	PN16
	1¼" to 2"	PN10
Temperature	-10°C to 110°C	

Material List


Body	Brass UNI EN 12165 CW617N
Gasket	NBR
Seat	POM
Spring	AISI 302

Dimensions

D	L	H	Kg
½"	53	30	0.125
¾"	58	37	0.19
1"	65	44	0.275
1¼"	73	56	0.45
1½"	78	63	0.565
2"	89	78	0.815

Brass Spring Check Valve Male x Female

Screwed BSPP, NBR Gasket

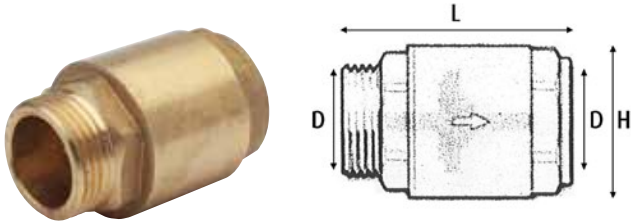

Pressure/Temperature Ratings

Opening Pressure	0.02 Bar	
Pressure	½" to 1"	PN16
	1¼" to 2"	PN10
Temperature	-10°C to 110°C	

Material List

Body	Brass UNI EN 12165 CW617N
Gasket	NBR
Seat	POM
Spring	AISI 302

Dimensions

D	L	H	Kg
½"	53	30	0.125
¾"	58	37	0.19
1"	65	44	0.275
1¼"	73	56	0.45
1½"	78	63	0.565
2"	89	78	0.815